


For Global Market

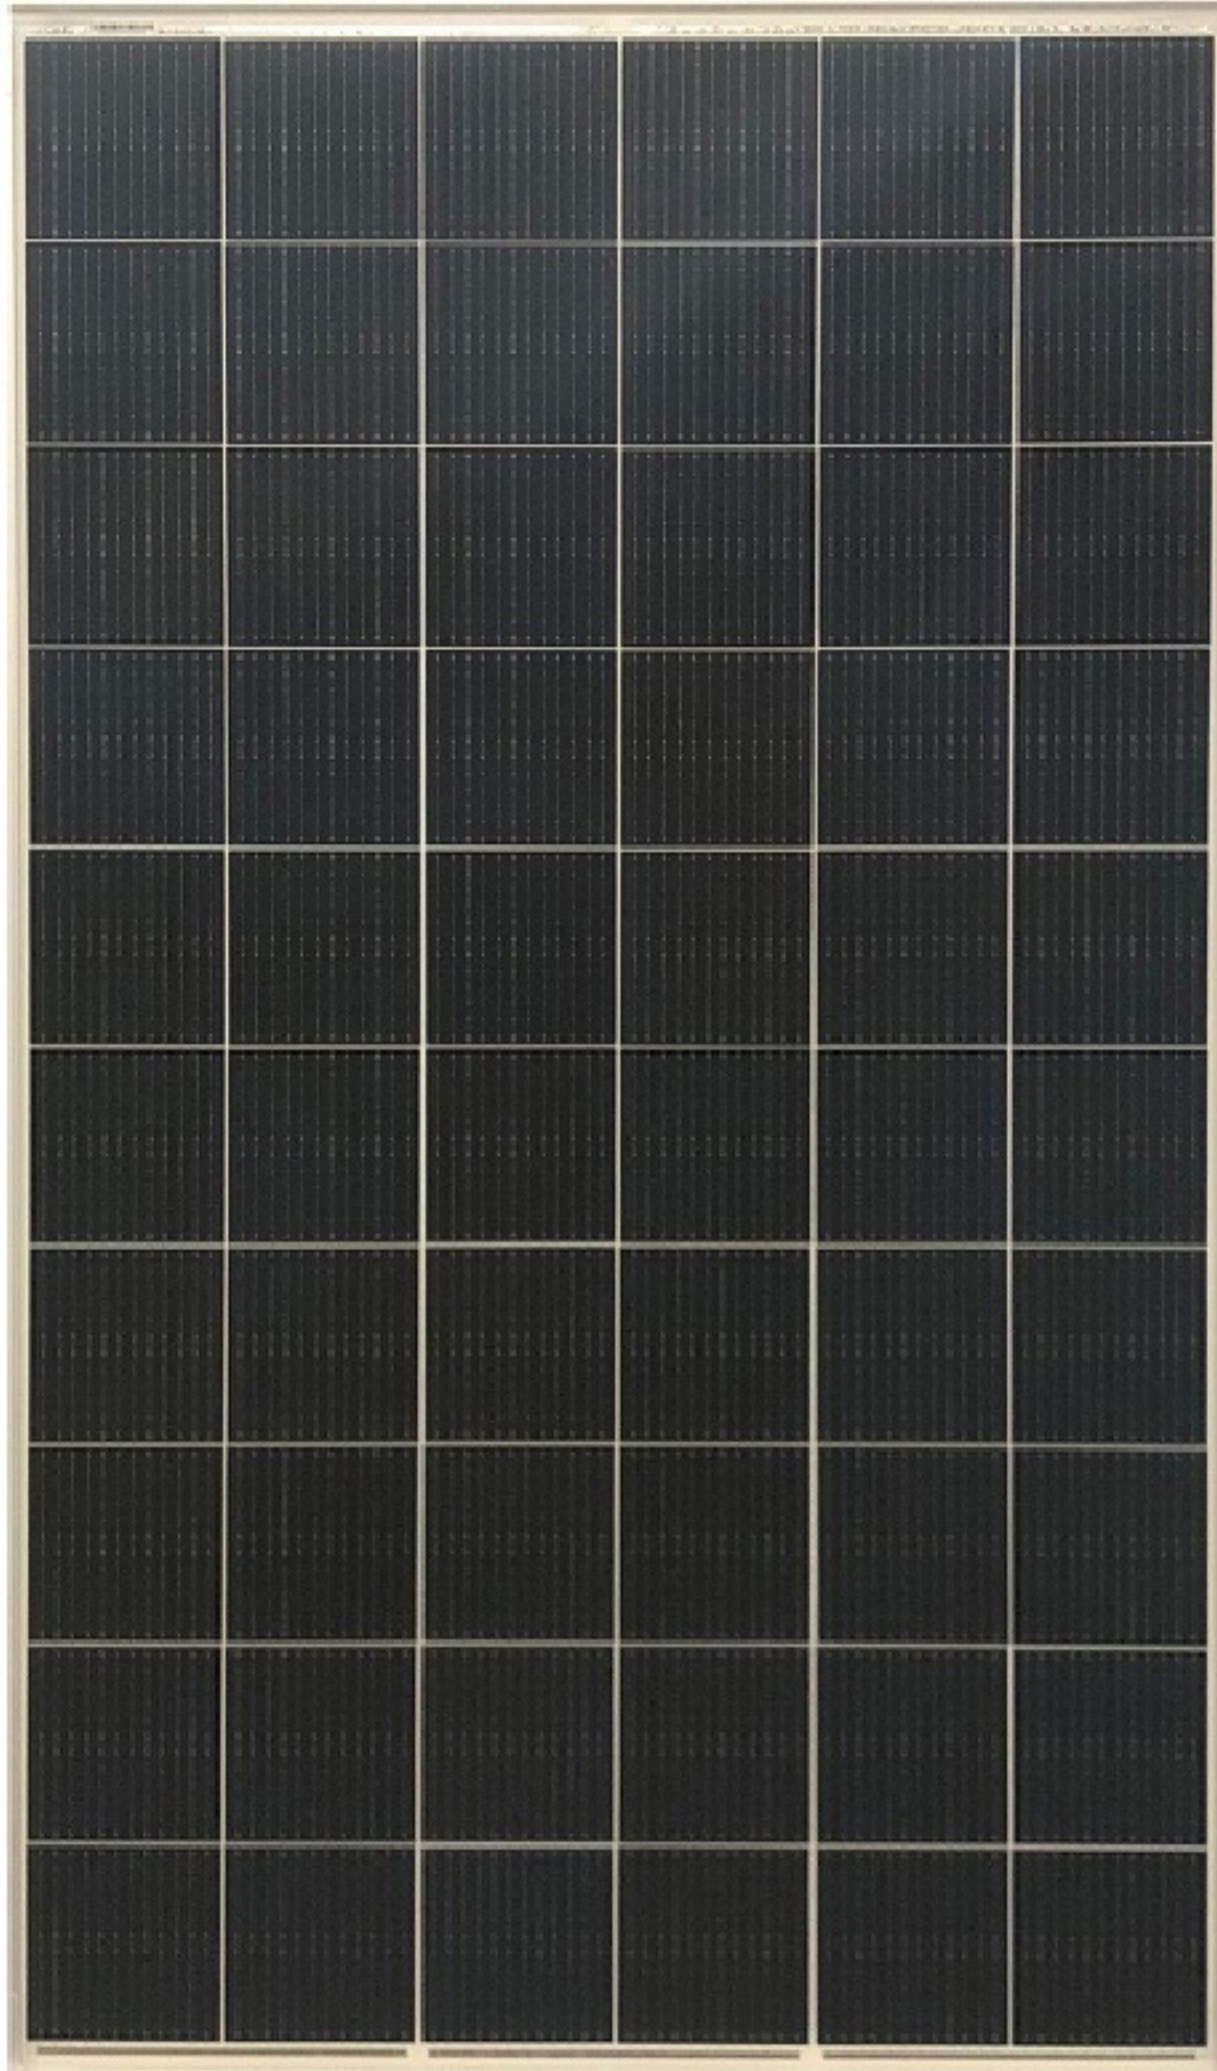

MaysunSolar

Monocrystalline

PV Module

MS(280-330)M-60 Series

12BB

- ▶ High PID resist performance
- ▶ Multi-busbar design decreases the risk of the cell micro-cracks and fingers broken.
- ▶ Excellent low light performance with advanced surface texturing and back surface field.
- ▶ Lower series resistance/improved light harvesting enable high conversion efficiency and more power output.

280	290	300	310	320	330	System voltage 1000V/1500V standard	EN
-----	-----	-----	-----	-----	-----	-------------------------------------	----

ELECTRICAL SPECIFICATIONS						
STC rated output (P _{mpp})*	280 Wp	290 Wp	300 Wp	310 Wp	320 Wp	330 Wp
PV Module size	1665*1002*35 MM					
Standard sorted output	0/+5 Wp					
Warranted power output STC (P _{nominal})	280 Wp	290 Wp	300 Wp	310 Wp	320 Wp	330 Wp
Rated voltage (V _{mpp}) at STC	31.97 V	32.45 V	32.93 V	33.41 V	34.19 V	34.33 V
Rated current (I _{mpp}) at STC	8.76 A	8.94 A	9.11 A	9.28 A	9.36 A	9.61 A
Open circuit voltage (V _{oc}) at STC	38.68 V	39.26 V	39.85 V	40.43 V	40.5 V	40.6 V
Short circuit current (I _{sc}) at STC	9.28 A	9.47 A	9.66 A	9.84 A	9.97 A	10.07 A
Module efficiency	17.2%	17.8%	18.4%	19.1%	19.7%	20.2%
Rated output (P _{mpp}) at NOCT	205.8 Wp	213.2 Wp	220.5 Wp	227.9 Wp	234.5 Wp	240.0 Wp
Rated voltage (V _{mpp}) at NOCT	28.95 V	29.21 V	29.64 V	30.07 V	30.64 V	30.92 V
Rated current (I _{mpp}) at NOCT	7.11A	7.30 A	7.44 A	7.58 A	7.66 A	7.76 A
Open circuit voltage (V _{oc}) at NOCT	36.02 V	36.36 V	37.08 V	37.42 V	37.82 V	38.00 V
Short circuit current (I _{sc}) at NOCT	7.57 A	7.77 A	7.92 A	8.07 A	8.27 A	8.34 A

Temperature coefficient (P _{mpp})	- 0.380%/K	Maximum system voltage (IEC)	1000V _{DC} / 1500V _{DC}
Temperature coefficient (I _{sc})	+0.042%/K	Number of diodes	3
Temperature coefficient (I _{mpp})	- 0.008%/K	Maximum series fuse rating	15 A
Temperature coefficient (V _{mpp})	- 0.373%/K	Operating Temperature	-40°C to +85°C
Temperature coefficient (V _{oc})	- 0.284%/K		
Normal operating cell temperature (NOCT)	46±2°C		

* Measurement tolerance +/- 3%




MAYSUN SOLAR

RELATED PARAMETERS	
Cell type	Monocrystalline
Number of cells / cell arrangement	60 / 6 x10
Cells dimension	6"
Packing unit	30 modules
Weight of packing unit (for container)	557 kg / 1228 lbs


MECHANICAL SPECIFICATIONS	
Outer dimensions (L x W x H)	1665 x 1002 x 35 mm 65.56 x 39.06 x 1.38 in
Frame technology	Aluminum, silver anodized
Module composition	Glass / EVA / Backsheet (white)
Weight (module only)	19 kg / 39.68 lbs
Front glass thickness	3.2 mm / 0.13 in
Junction box IP rating	IP 65/67
①Cable length(IEC)	600/900 mm / 23.62/35.43 in
Cable diameter (IEC)	12 AWG /4 mm ²
②Maximum load capacity	5400 Pa
Fire performance (IEC)	Class C
Connector type (IEC)	MC4 compatible

Refer to Maysun Solar crystalline installation manual.

QUALIFICATION AND LINEAR WARRANTIES	
Product standard	IEC61215, 61730
Extended product warranty	12 years
Output decline 3%/year performance P _{mpp} (STC)	1 st year
Output decline 0.7%/year performance P _{mpp} (STC)	2 nd - 25 th years

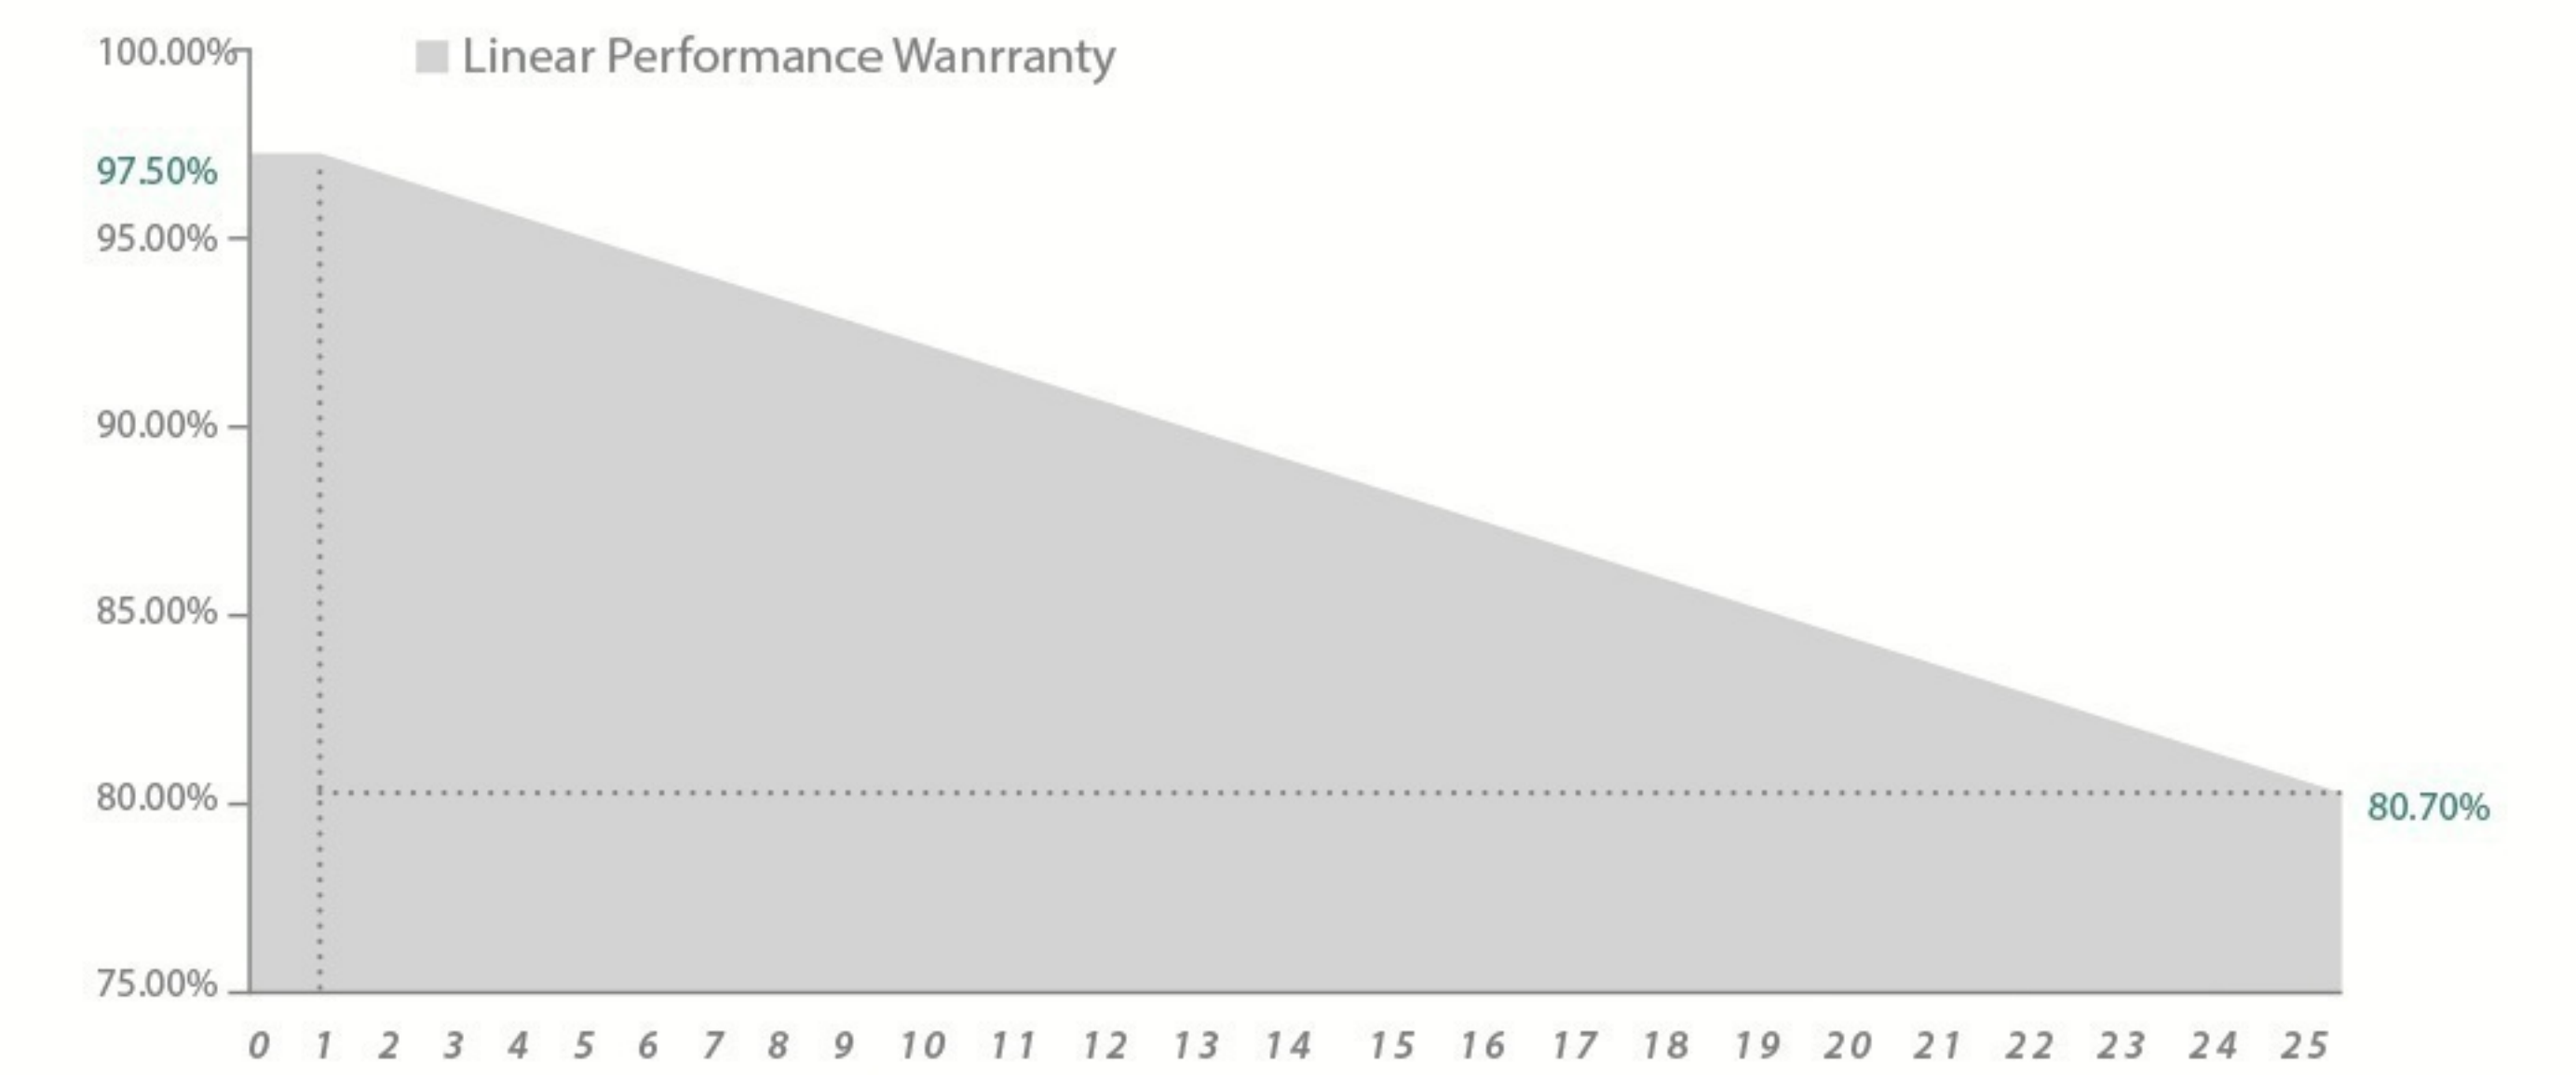

I-V Curves of PV module MS330M-60 at various solar irradiance

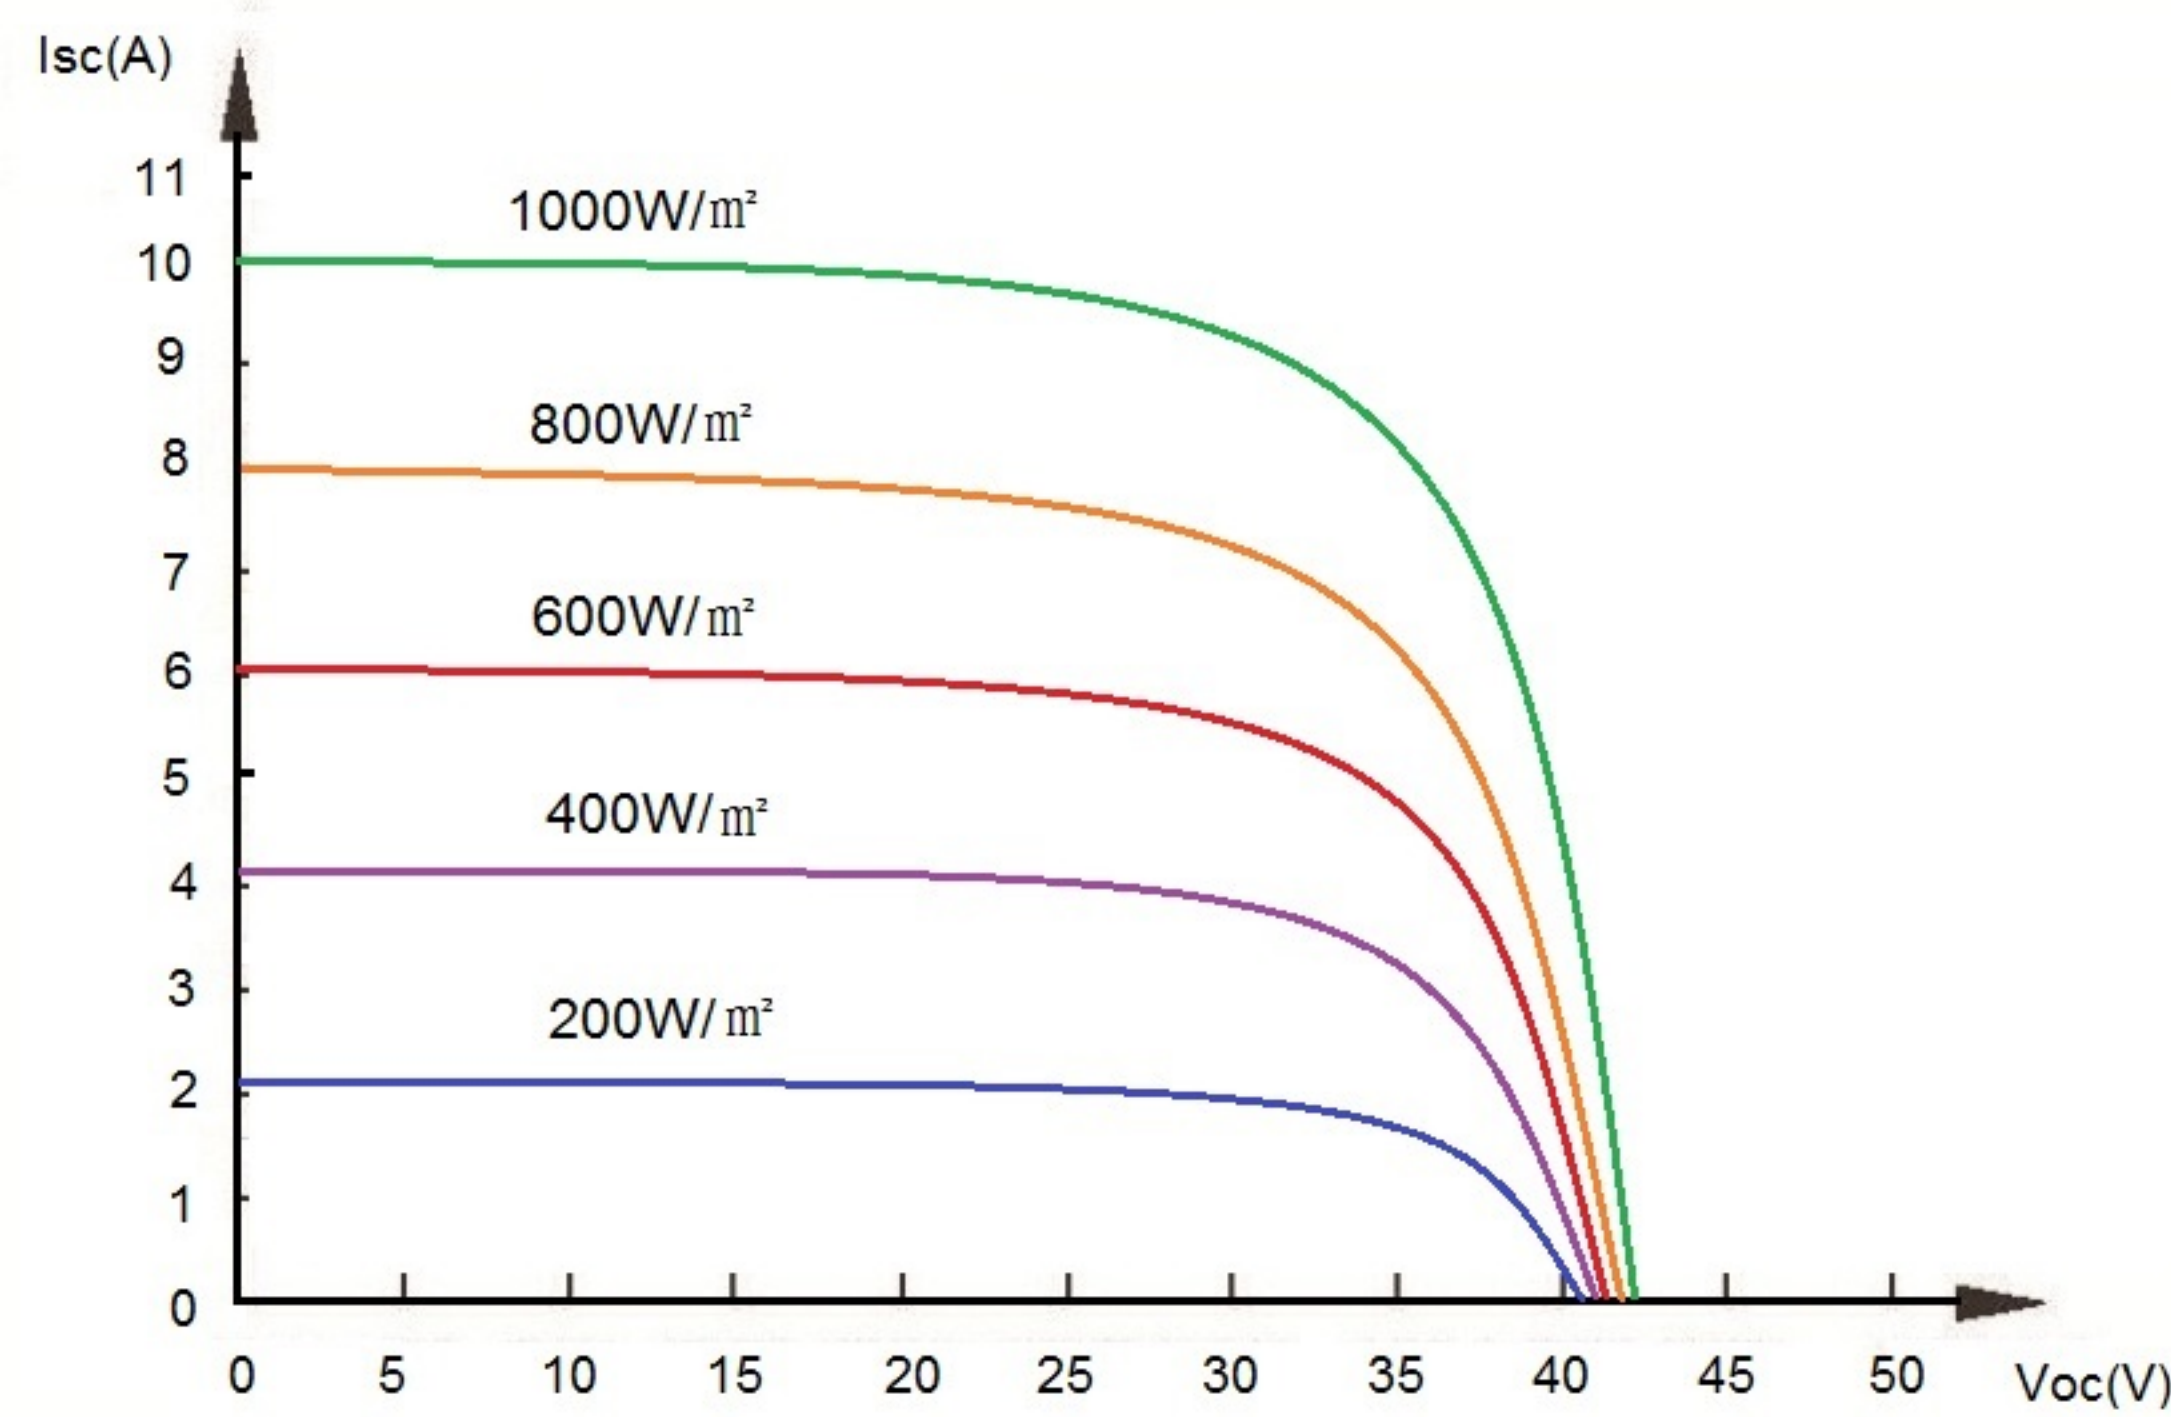

MODULE DIMENSION DETAILS			
Front view	Side view	Rear view	Frame cross section

Maysun Solar FZCO Reserves the right of final interpretation.
Specifica tions and designs included in this datasheet are subject to change without notice.

Maysun Solar FZCO
Address: No.FZS2AB01, Jebel Ali, Dubai, UAE
Website: www.maysunsolar.com